
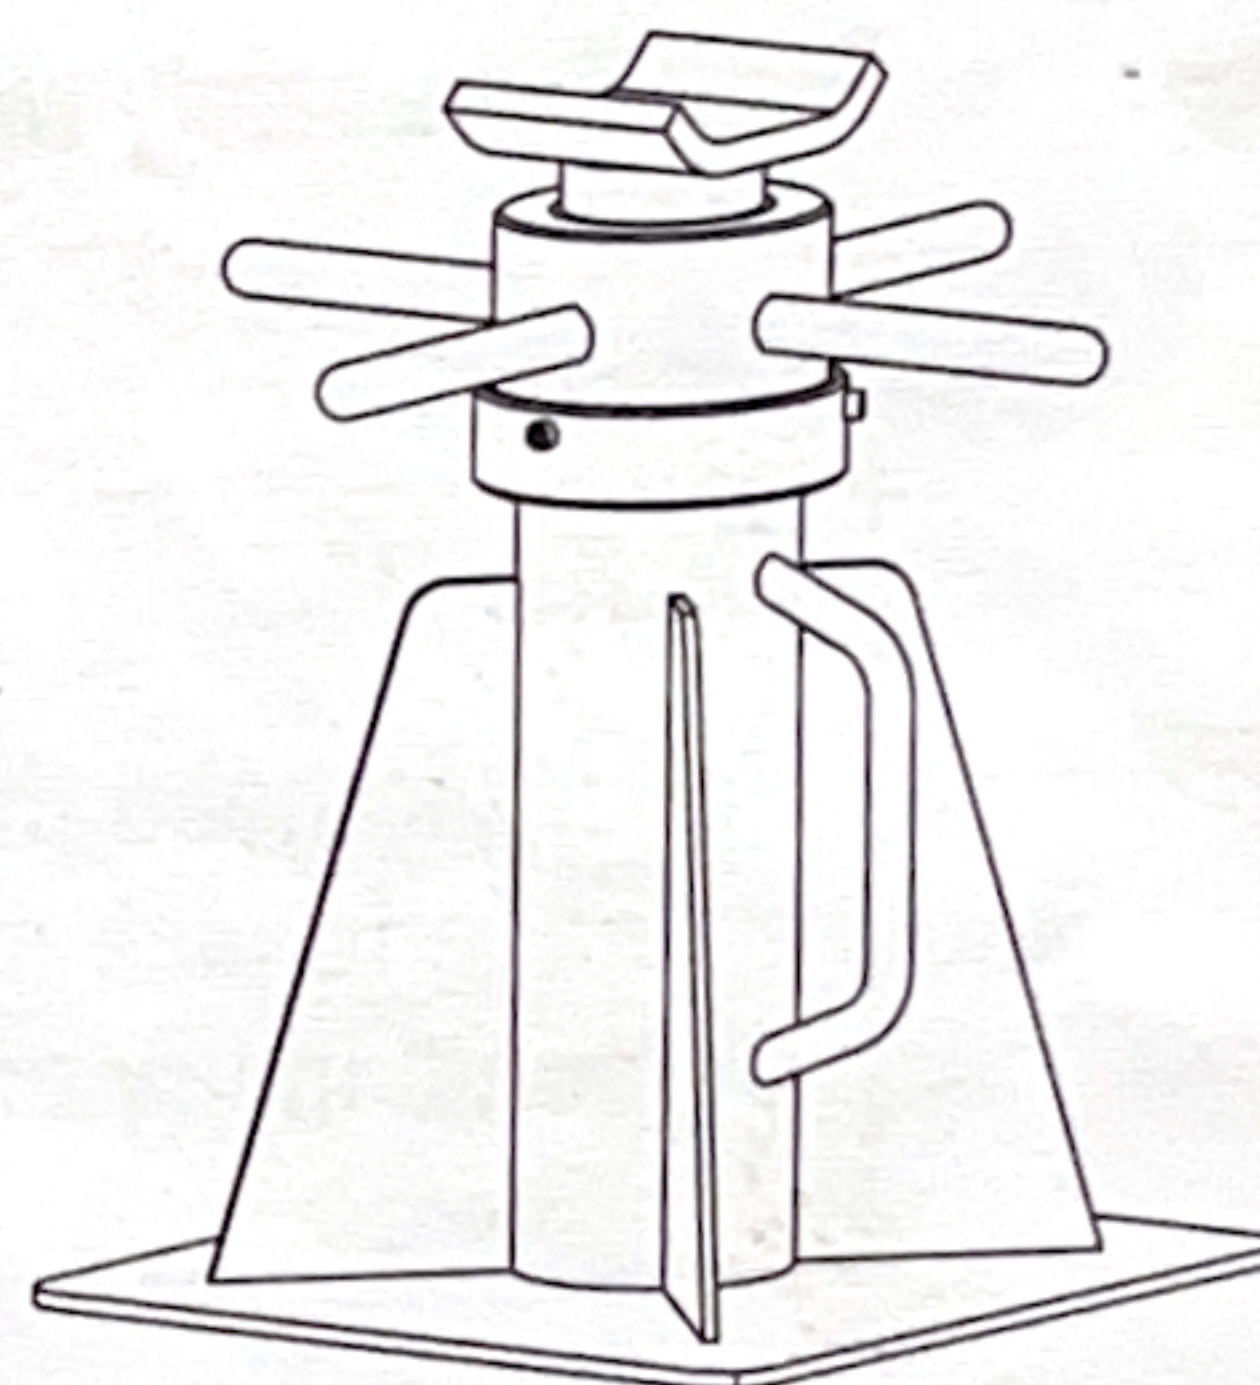
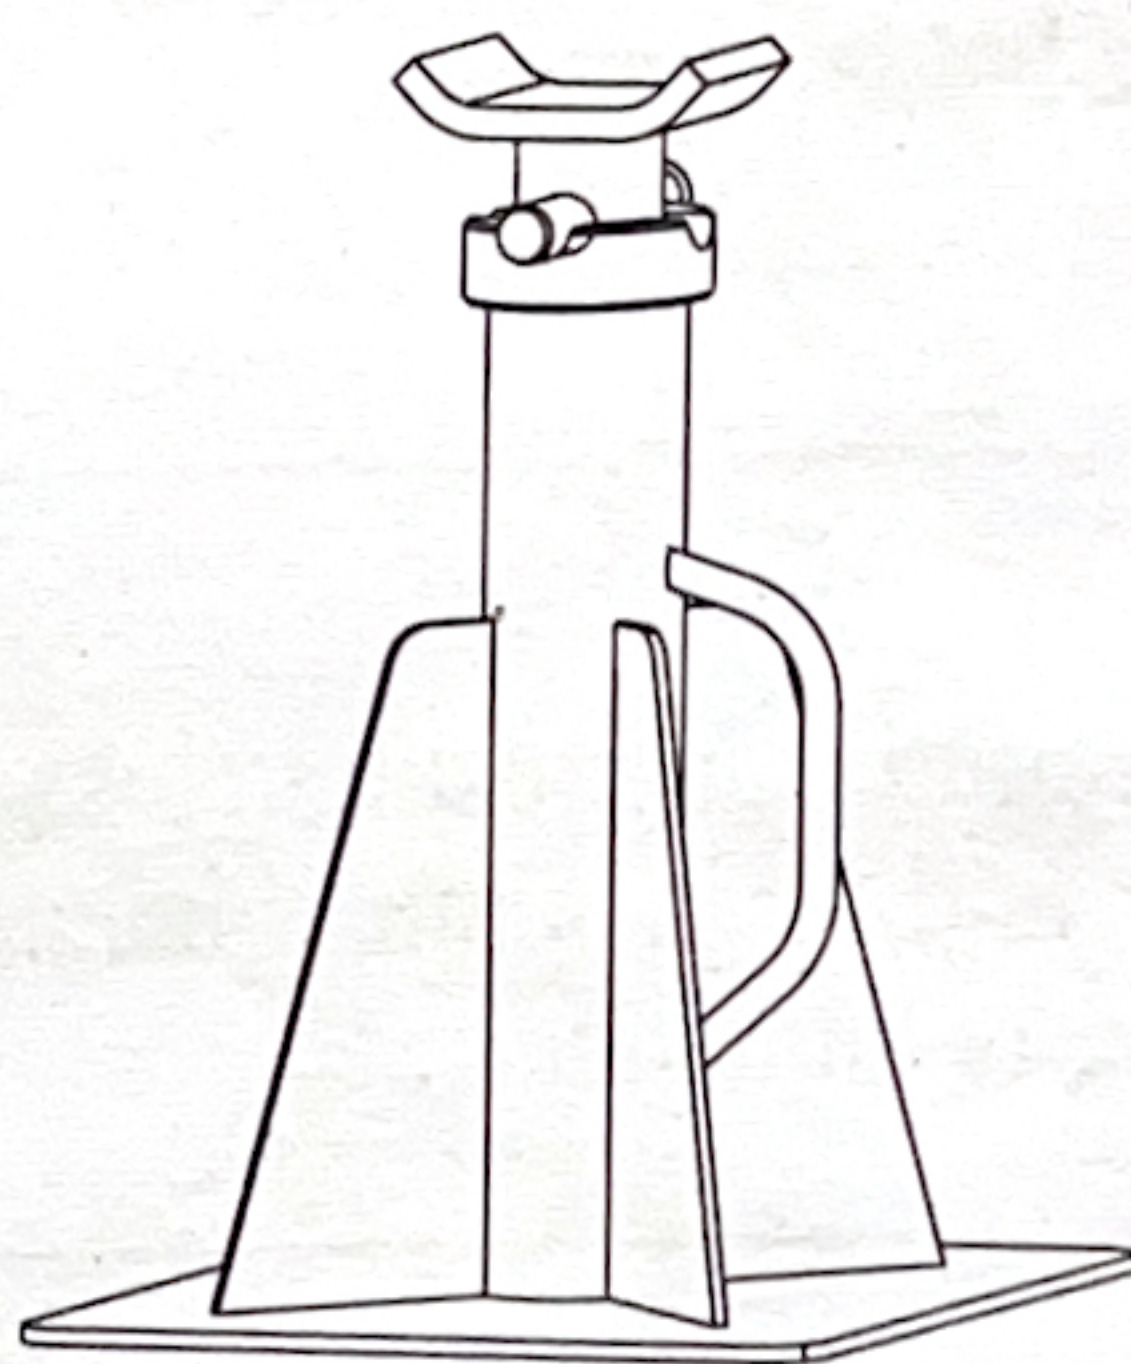


HEAVY-DUTY VEHICLE SUPPORT STAND

OWNER'S MANUAL

Model No:

TZ100001, TZ100002, TZ150001, TZ150002
TZ200011, TZ200012, TZ250001, TZ250002

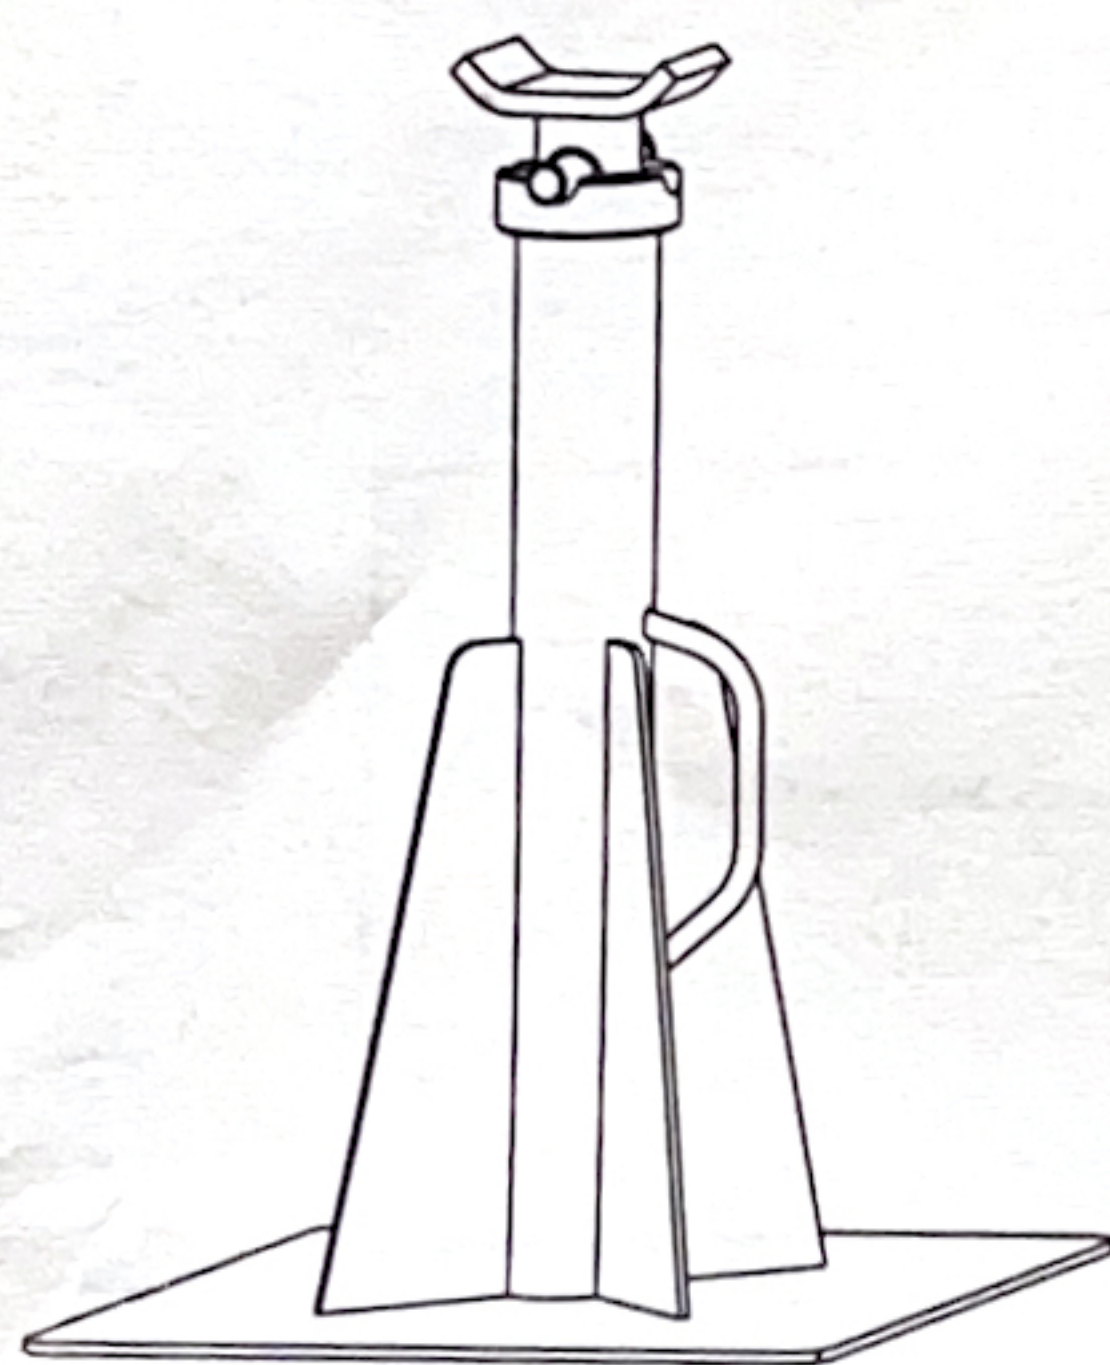

FOR YOUR SAFETY

please read these instructions carefully and retain them for future use

SPECIFICATIONS

MODEL	CAPACITY	MIN. HEIGHT	MAX. HEIGHT	BASE DIMENSION
TZ100001	10t	450mm	698mm	330mmx330mm
TZ100002	10t	655mm	1087mm	460mmx460mm
TZ150001	15t	445mm	631mm	330mmx330mm
TZ150002	15t	645mm	1077mm	460mmx460mm
TZ200011	20t	410mm	600mm	330mmx330mm
TZ200012	20t	665mm	1090mm	460mmx460mm
TZ250001	25t	415mm	539mm	330mmx330mm
TZ250002	25t	680mm	968mm	460mmx460mm

IMPORTANT SAFETY INFORMATION

Read these safety warnings before operation.

WARNING!

Failure to heed these warnings may result in loss of load, damage to jack stands, and/or jack stand failure resulting in personal injury or property damage.


WARNING!

Don not overload jack stands beyond rated capacity. Overloading can cause damage to or failure of the jack stands.

Position load on center of saddle only. Always use stands in pairs on hard level surface capable of sustaining the load. Use of stands on other than H hard level surfaces can result in stand instability and possible loss of load.

OPERATION

1. Refer to your vehicle owner's manual for proper jacking procedures. Life only on areas of the vehicle as specified by vehicle manufacturer.
2. Position stands under vehicle at points specified by vehicle manufacturer as proper load support points.
3. To adjust stands:
 - ① Screw low/high stand fitted with thrust bearing.
 - ② Reinforced low stand with controlled pin holes and with turned and oil blacked sliding part.
 Reinforced high stand with holes without controlled pin.
4. Carefully lower load onto stands.

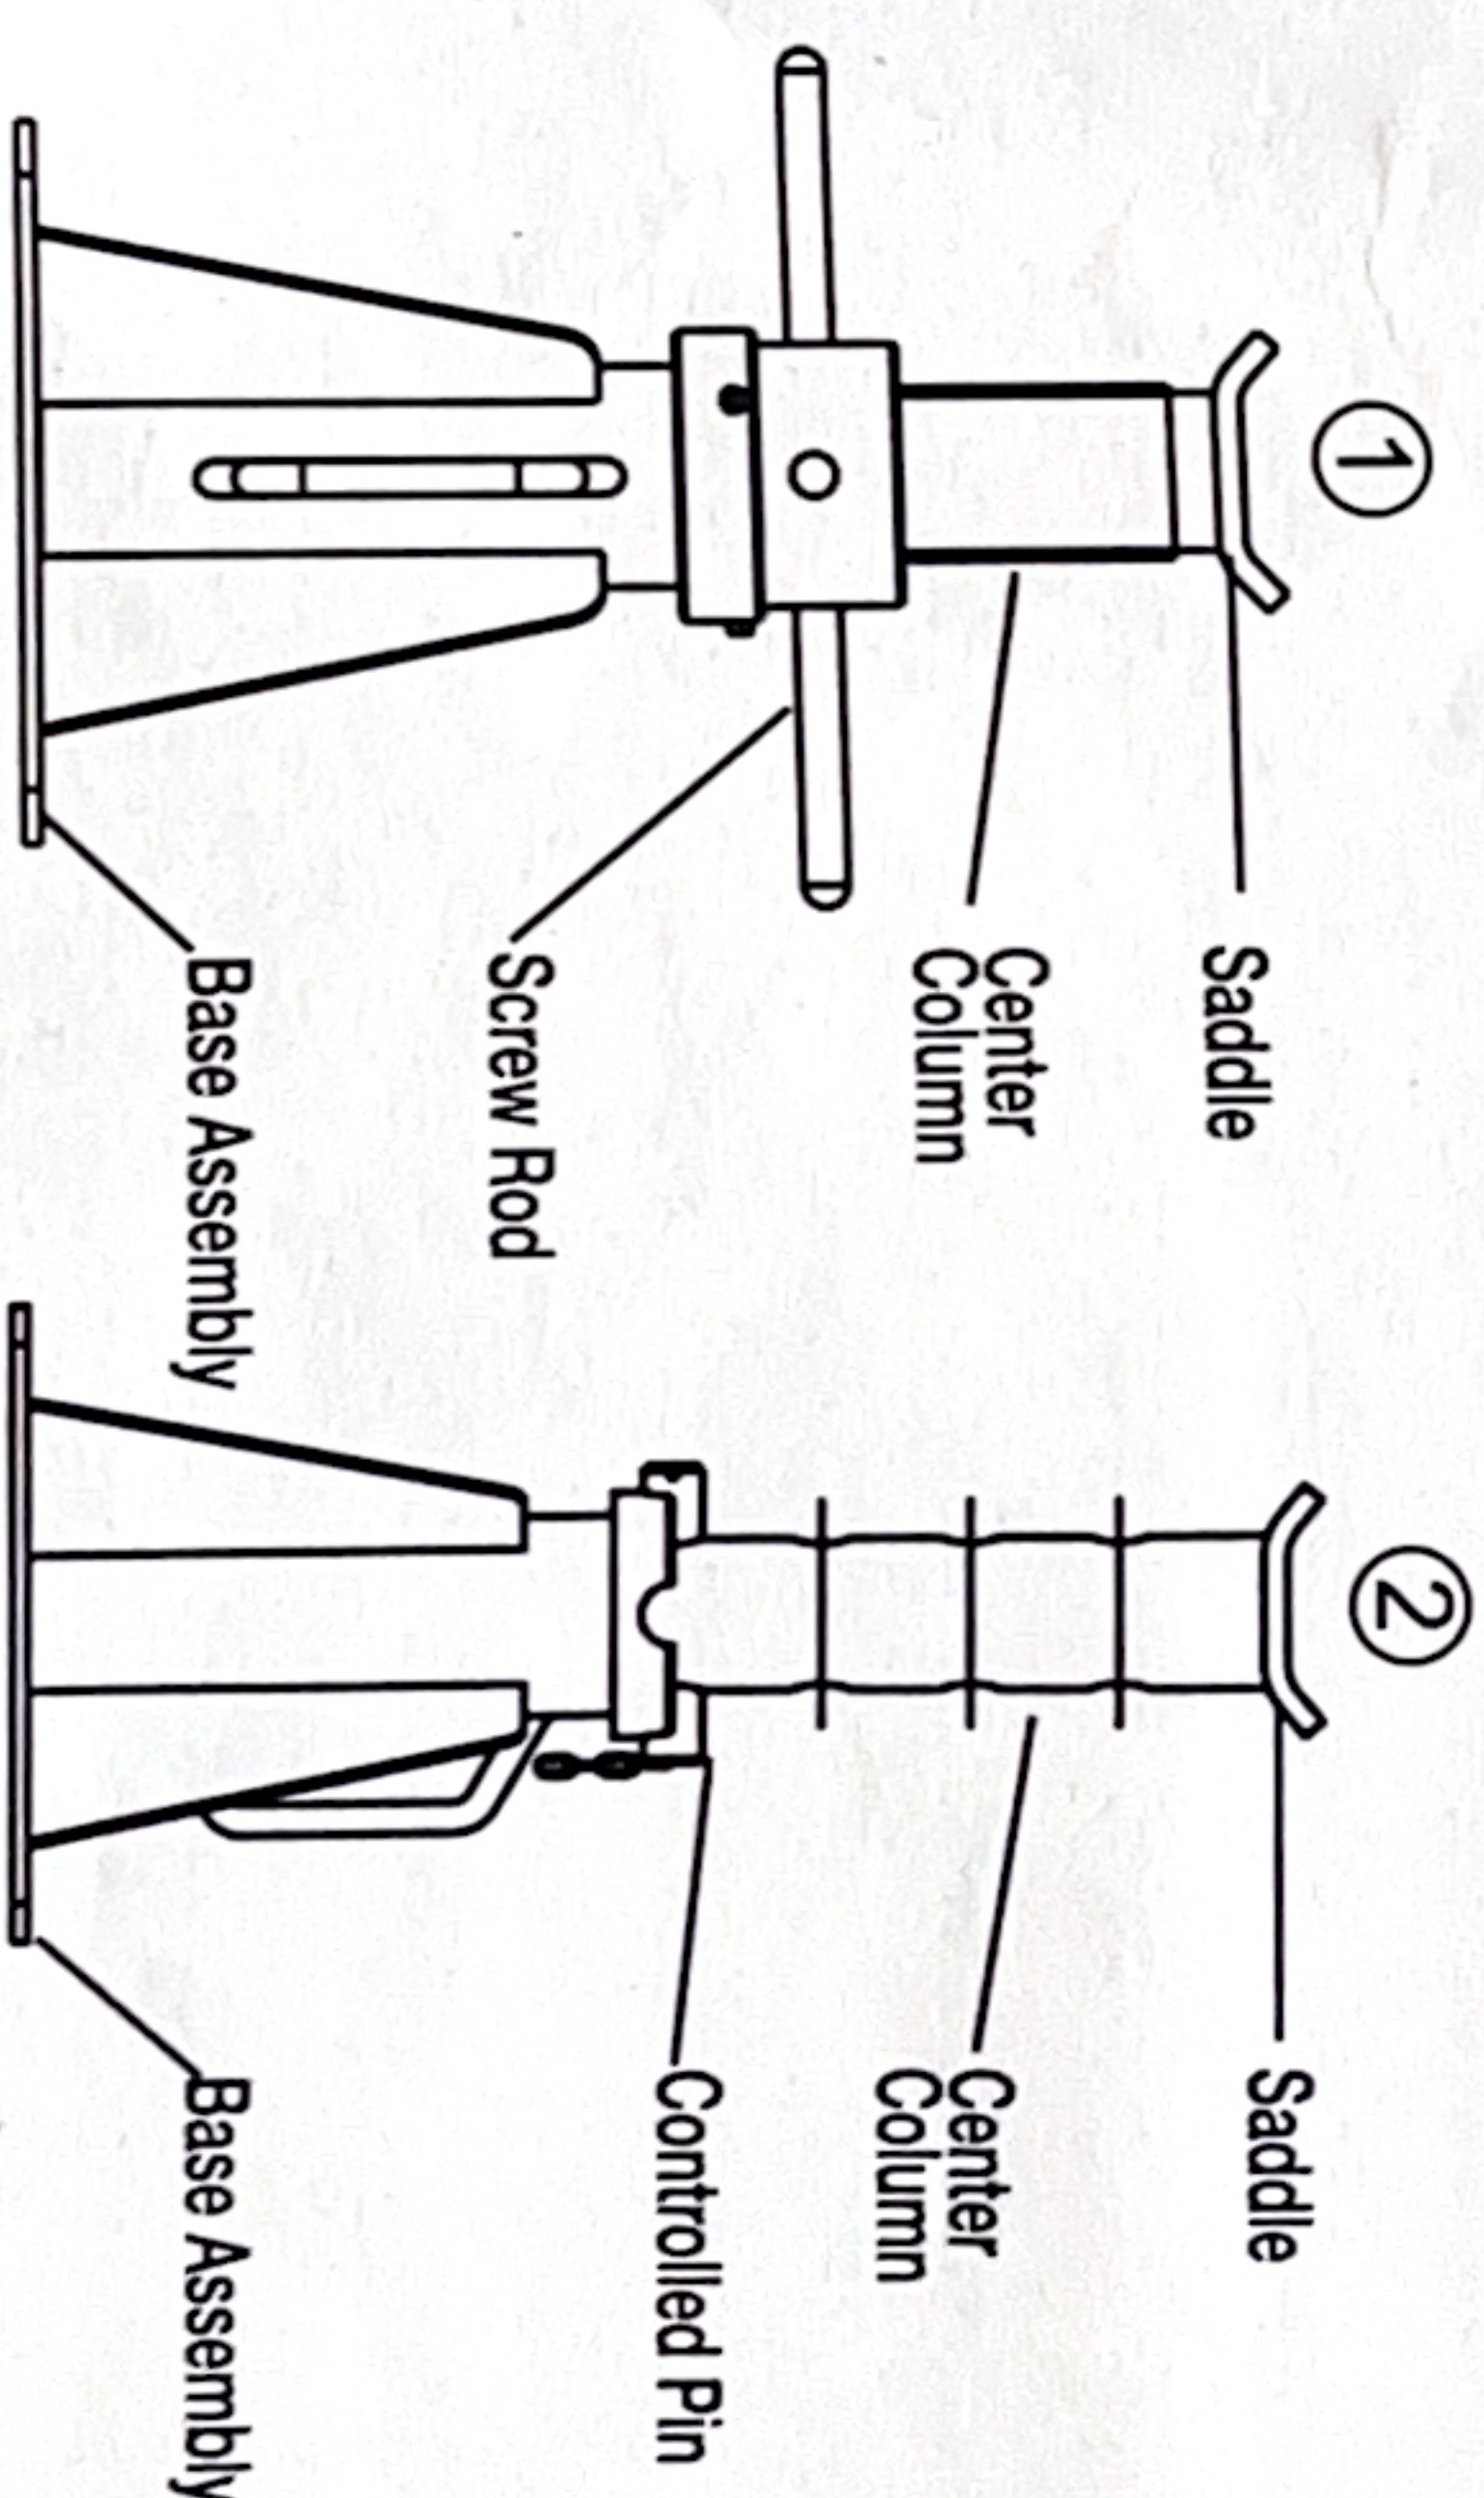

MAINTENANCE & INSPECTION

1. Visual inspection shall be made before each use of the stands, checking for cracks, cracked welds and missing and/or damaged parts. Any stand that appears to be damaged in any way shall be removed from service immediately.
2. Because of the potential hazards associated with the misuse of equipment of this type, no modifications shall be made to the product.